


LAARMANN®

Innovators in Solids

Laboratory Roll Crusher **LMRC**

Laboratory Roll Crusher
for intermediate size
reduction

- Fast, easy adjustment of product sizing
- Replaceable manganese steel roll shells and side plates
- Heavy duty spherical roller bearings
- Heavy fabricated steel frame

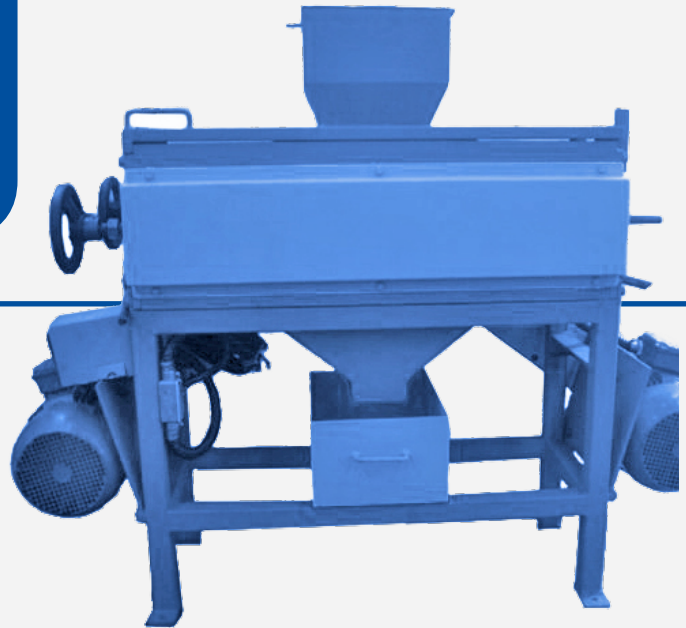


Laarmann Roll Crushers for intermediate size reduction

Description

LAARMANN Roll Crushers are typically applied in laboratory or pilot plant applications after primary reduction of the infeed material.

Roll crushers operate with a minimum of dust generation and produce a material with a tight size envelope containing a minimum of fines.

Designed for rapid, controlled size reduction of ore, mineral or rock prior to metallurgical testing or further milling or grinding the LAARMANN LMRC Roll Crusher has is built with two off same diameter individually powered contra-rotating rolls, so the nipping process produces an ideal crushing environment for a wide variety of materials. Product sizing is controlled by an (adjustable) gap setting between the 2 rolls. One roll is heavy duty spring mounted as protection against uncrushable material attempting to pass between the rolls.

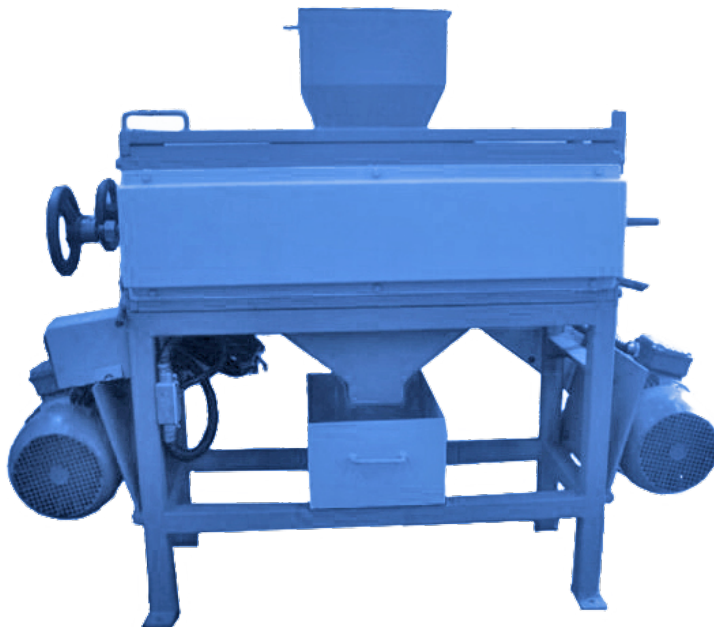

LAARMANN Roll Crusher LMRC

Features and Benefits

- Rugged, minimum maintenance design
- Heavy duty spherical roller bearings
- Heavy fabricated steel crusher frame & support base
- Replaceable manganese steel roll shells and side plates
- Compact design with drive motors installed below the crushing chamber
- Fabricated feed hopper and dust extraction outlet
- Product drawer
- Full drive guarding
- Electric pre-wiring with an IP55 enclosed push button & motor protection station
- Fast, easy adjustment of product sizing

Applications

- Ore
- Mineral
- Rock prior to metallurgical testing
- Further milling or grinding

Roll Crusher LMRC

| TECHNICAL DATA | |
|-------------------------|-----------------------|
| Roll Size (Dia x Width) | 200 x 150 |
| Standard Roll face | Smooth |
| Max Feed Size | 30 mm |
| End-fineness | <1 mm |
| Optimum reduction ratio | 4 to 1 |
| Roller Speed | 380 rpm |
| Power | 1.1 kW (3x400V/ 50Hz) |
| Approximate mass | 400 Kg |

LAARMANN

Innovators in Solids

www.laarmann.eu

Your local contact



Laarmann Group B.V.

Op het Schoor 6
6041 AV Roermond
THE NETHERLANDS

t: +31 475 470 217
f: +31 475 470 242
e: sales@laarmann.info